

# QUICKMARK PERMANENT MARKER



Part Number 1096 (10-70 Clamp)

## The Easy & Low Cost Way to Mark Powerlines

The Quickmark is a permanent powerline warning marker that makes the line easily visible for anyone working in the vicinity.

The lightweight 260mm diameter bright orange plastic disc, with prismatic yellow center reflector identifies powerlines and applies no windage to the conductor as the disc swings out in a controlled and even manner and does not flap in the wind.

The durable plastic disc will not degrade under prolonged exposure and/or severe weather conditions.

- Ideal for construction sites, industrial plants, quarries or anywhere machinery can strike low hanging power lines
- Lightweight 260mm diameter orange plastic disc with prismatic centre reflector
- Moves with air currents to enhance visibility but will not flap
- Patented SnapFast spring clamp allow fast & simple installation by hot stick from the ground to any size conductor, either 10-70 or 6-16
- Prevents costly line damage & outages caused by collisions with high vehicles or loads
- Can be used on lines up to 115kV



Part Number 1097 (6-16 Clamp)



Swinging action

*Disclaimer:*

*May not stand prolonged high winds or cyclones*

# INSTALLATION & REMOVAL of **QUICKMARK** PERMANENT MARKER

## EASY TO INSTALL ON LIVE OVERHEAD LINES

- Open the 10-70 or 6-16 clamp as shown
- Push the unit up against the conductor and the clamp snaps shut


Install with Red Apply Tool 1024  
for 10-70 clamp



1. Pull on the rings until the clamp stays open  
Attach tool to a hotstick



2. Pull the clamp ring over the peg on left cup of tool
3. Swing the spring loaded right cup to the left & put clamp into cup. Release cup so clamp is held in tool.  
See diagram below

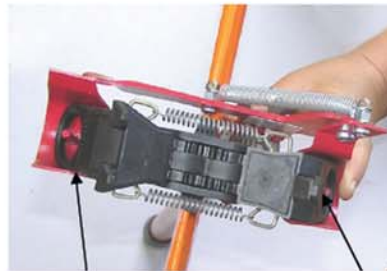

Shows rings hooked over peg

Install with Orange Apply Tool 1027  
for 6-16 clamp



## EASY TO REMOVE

Remove either clamp size  
with Removal Tool 1005

